
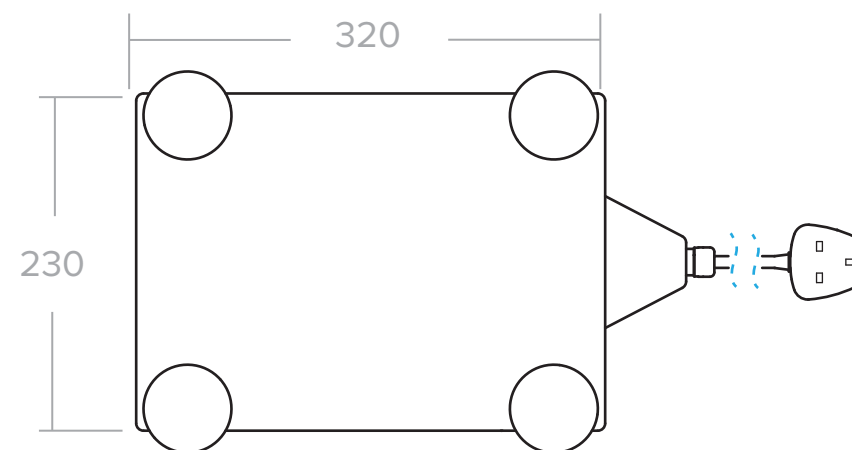
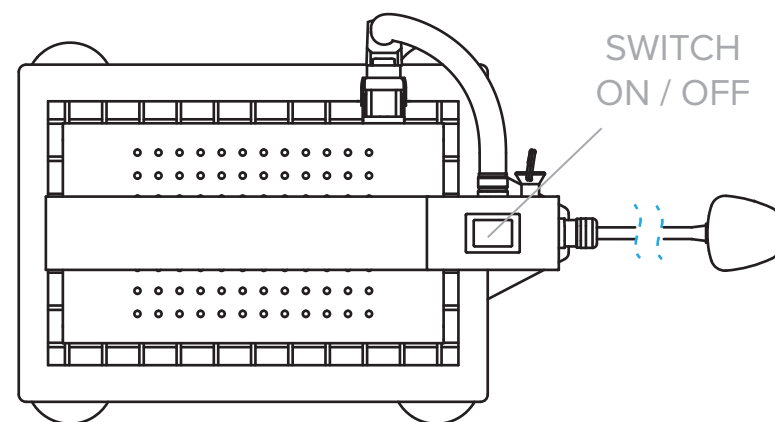
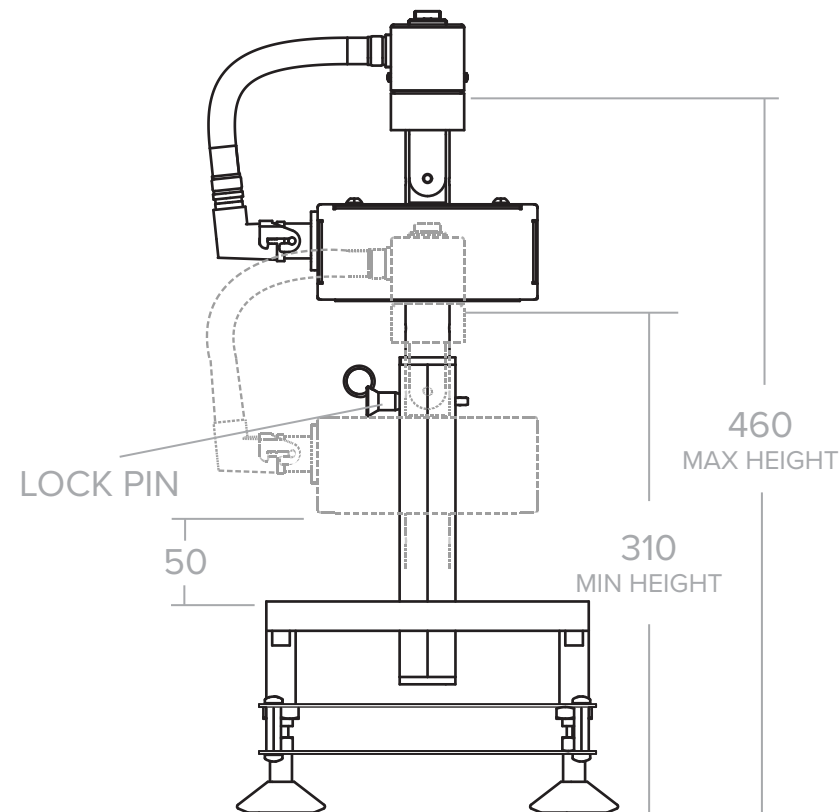


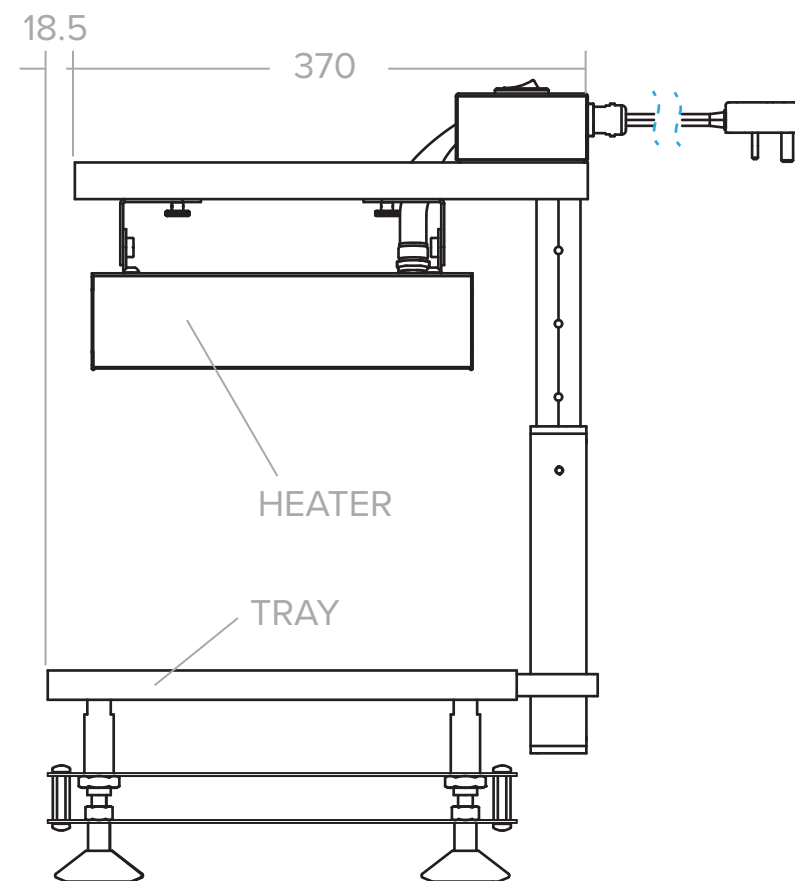

1. Height adjustable test stand with fixed position material tray
2. 1.6 kW 230 V ceramic long wave heater assembly
3. 1.5 kW 230 V quartz medium wave heater assembly
4. 1.5 kW 230 V tungsten heater assembly*
5. Fluke 62 MAX infrared thermometer

*Supplied with interchangeable element models:

- Fast medium wave QTS 750 W 240 V (x 2)
- Short wave QHS 750 W 240 V (x 2)

PORTABLE TEST STAND

23.10.25

Tolerances apply, all dimensions mm.

