

Ceramic Full Flat Infrared Heating Element Hollow with type K Thermocouple

Properties The standard range of ceramic infrared elements in stock are used in a wide range of industrial and engineering applications such as thermoforming, packaging, paint curing, printing, drying, gluing, sterilisation, roasting etc. They are also very effectively used in infrared outdoor heaters and saunas. Most plastics and many other materials absorb infrared best in the wavelength range of 2-10 μm , which makes the ceramic heater the most popular radiant emitter on the market.

Hollow style ceramic elements produce a uniform output better suited to emitters positioned closer to the target material.


Recommended radiation distance from heater is 100 - 200 mm.

Technical specification


Material	Ceramic body, black glaze, embedded resistance heating coil
Heater Voltage	230 V (<i>standard</i>)
Operating temperature	Max permissible 800°C (1472 °F)
Useful wave-length range	2 - 10 μm (<i>microns</i>) - Long wave
Dimensions	245 x 60 x 36 mm
Average weight	268 g
Electric connection	120 mm ceramic beaded power leads 150 mm ceramic beaded thermocouple leads
Reflector thickness	Recomended thickness 0.75 - 0.9 mm <i>min/max thickness 0.5 - 1.5 mm</i>
Mounting slot size	42 x 15 mm
Element spacing	Minimum spacing between elements 5 mm
Average operating life	Up to 20,000 hrs depending on conditions
Standards	CE
Packaging (<i>L x W x H</i>)	252 x 65 x 64 mm

Standard FFEH TcK range

	Mean Surface Temperature °C	Max Power Density kW/m ²
400 W	495	24
500 W	550	30
600 W	607	36
800 W	684	48
1000 W	755	60

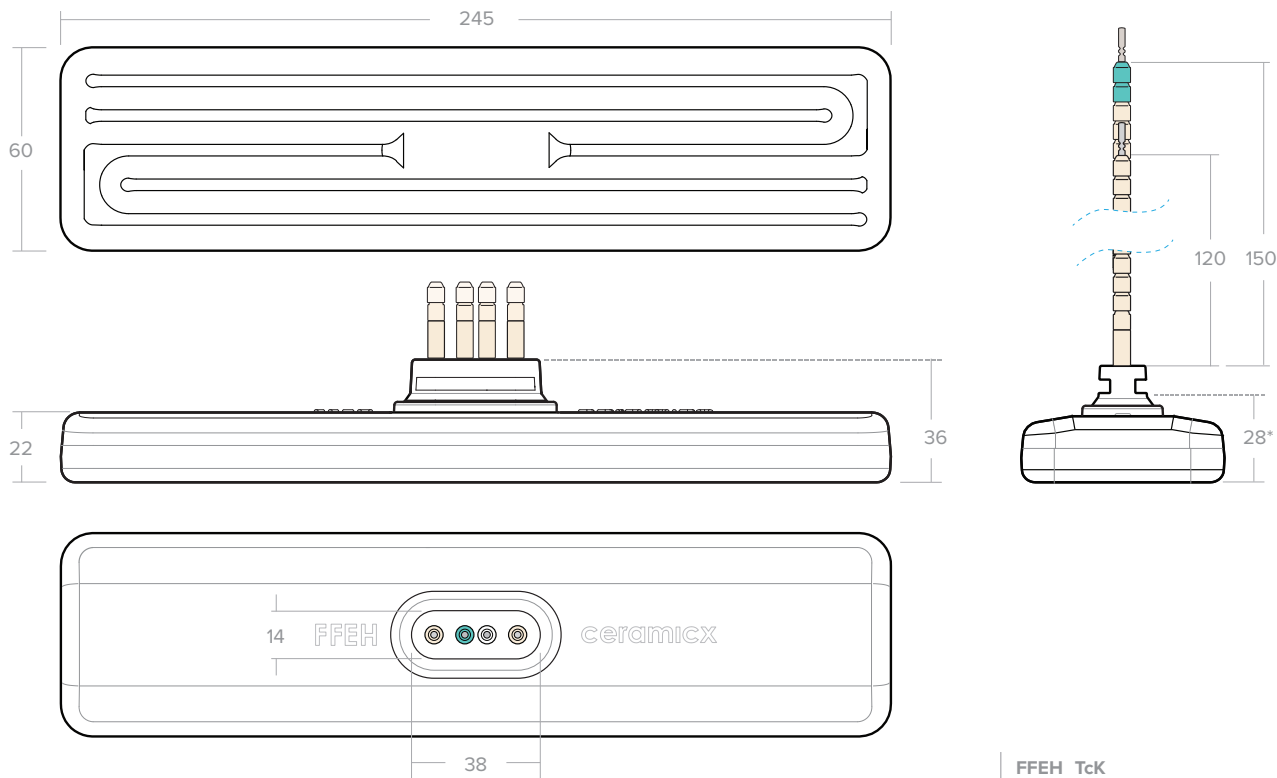


Element supplied with
Wave Spring and Clip



FFEH TcK
FULL FLAT ELEMENT HOLLOW
WITH TYPE K THERMOCOUPLE
Tolerances apply, all dimensions mm.
* Face of reflector - face of element using
0.75 mm reflector, mounting hole size 15 x 42 mm



25W32

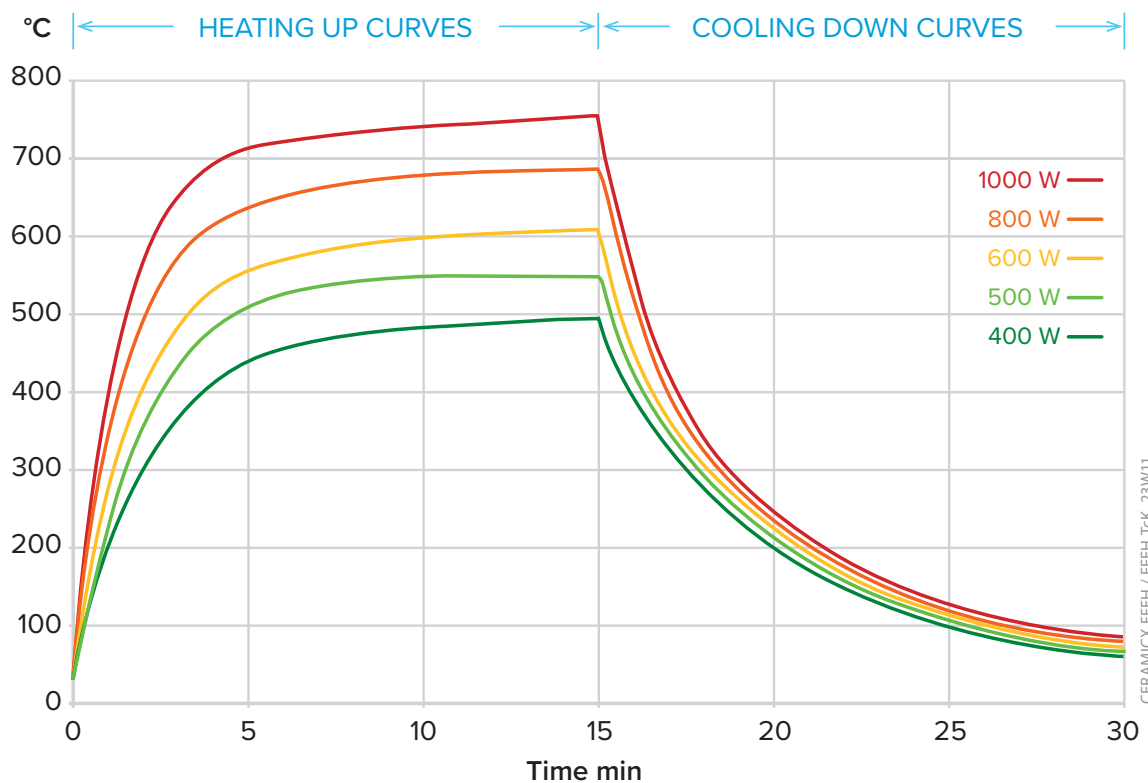

FFEH TcK Heat up and cool down curves showing average surface temperature measured with a thermal imaging camera set to an emissivity of 0.95 (element mounted in a polished aluminium clad steel reflector)